

NH21
NH25






Oversigtsblad / Übersicht / Design features

for NH 21 cylinder





für NH 21 Zylinder

for NH 21 cylinder

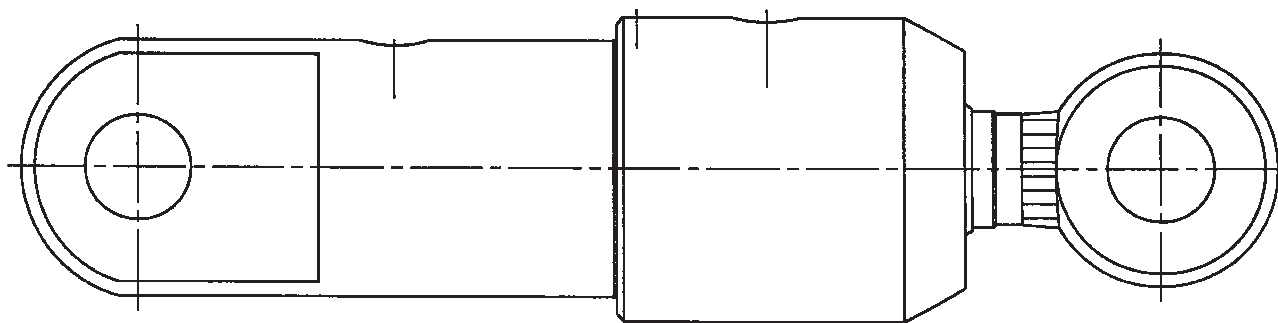

* Grundtyper/
Zylinderbefestigung/
Basic types


Stempelstangsophæng/
Kolbenstangenbefestigung/
Piston rod mounting

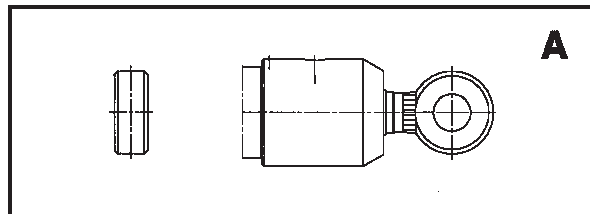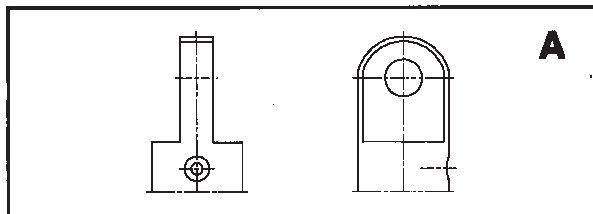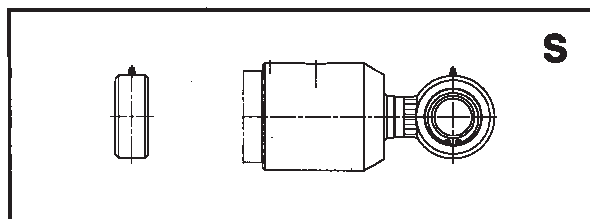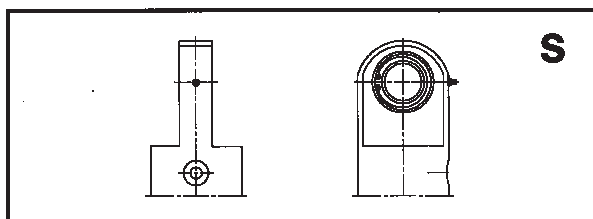



Technical specifications

NH21

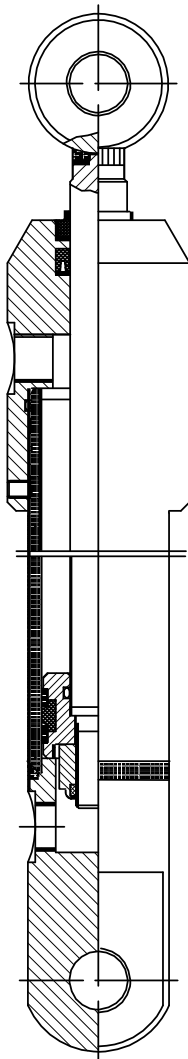

Piston rod:

Centreless ground steel, which is hard-chrome plated
min. 20 µm.
Hardness min. 850 HV.
Ra max. 0.3 µm.
External tolerance h9.

Seals:

(Standard). See sealing guide

Mounting:

A Fixed mounting.
S Spherical bearing.

Connections:

Cylindrical BSP thread, threaded length corresponding to standard fittings.

Operation pressure:

Operation pressure: Max. 210 bar.

Piston velocity:

Max. piston velocity: 0,3 m/s.

Operating temperature:

Temperature range: -20° C to + 80° C.

Pressure medium:

Hydraulic oil on a mineral oil base.

Test:

The cylinders are tested according to spot test.

Order code:

See specification form 3.

General:

NH 21 is a double acting hydraulic cylinder for light mobile applications and similar purposes.
Bore from Ø 40 - Ø 100 mm.

Construction:

(See sketch).

Zylinderrohr:


Steel tube (SIS 2172)
Honed to Ra max. 0,3 µm.
Internal tolerance H9.





Målskitse/Maßblatt/Dimension sketch

NH21-A

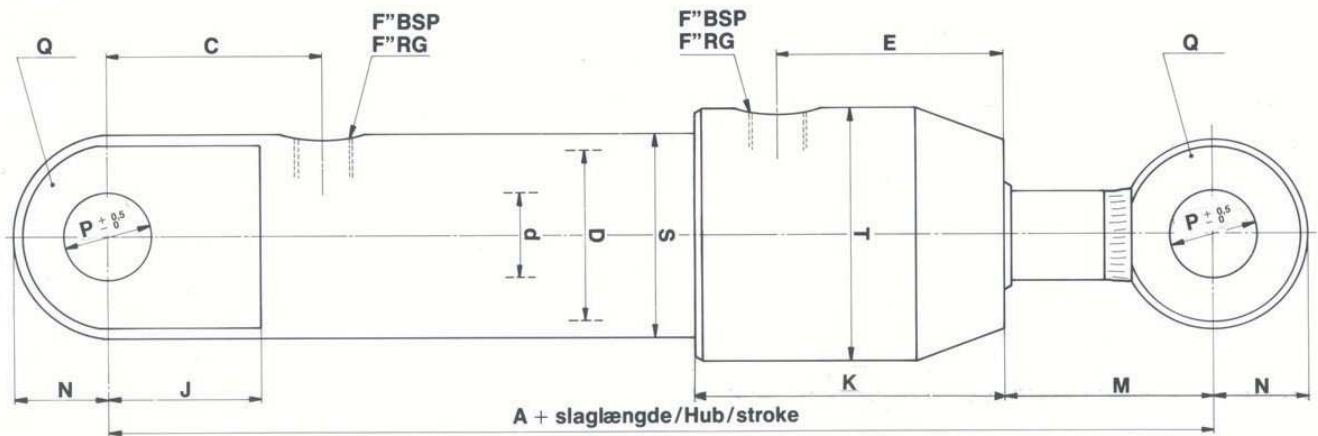



Målskema/Maßtabelle/Dimension table

NH21-A

D/d	A	N	M	E	S	T	P	J	Q	F	C	K	Lmin.
40/20	215	25	48	48,5	50	64	20,5	38	20	3/8"	54	102	10
40/25	215	25	48	48,5	50	64	20,5	38	20	3/8"	54	102	10
50/25	252	27,5	67	54,5	60	78	25,5	45	25	3/8"	67	109	15
50/35	252	27,5	67	54,5	60	78	25,5	45	25	3/8"	67	109	15
63/30	282	30	77	61	73	88	30,5	51	30	1/2"	75	121	15
63/40	282	30	77	61	73	88	30,5	51	30	1/2"	75	121	15
80/40	312	40	87	71	90	107	35,5	61	40	1/2"	85	130	15
80/50	312	40	87	71	90	107	35,5	61	40	1/2"	85	130	15
100/50	352	50	83	83	110	130	45,5	77	50	1/2"	109	147	20
100/65	352	50	83	83	110	130	45,5	77	50	1/2"	109	147	20

Alle angivne mål er i (mm). Ret til ændringer forbeholdes.

Alle angegebenen Maße sind in (mm). Wir behalten uns das Recht auf Änderungen vor.

Unless otherwise specified, all dimensions are in (mm). Right to alterations reserved.


Lmin. = Min. slaglængde/Mindesthub/Min. stroke.





Målskitse/Maßblatt/Dimension sketch

NH21-S

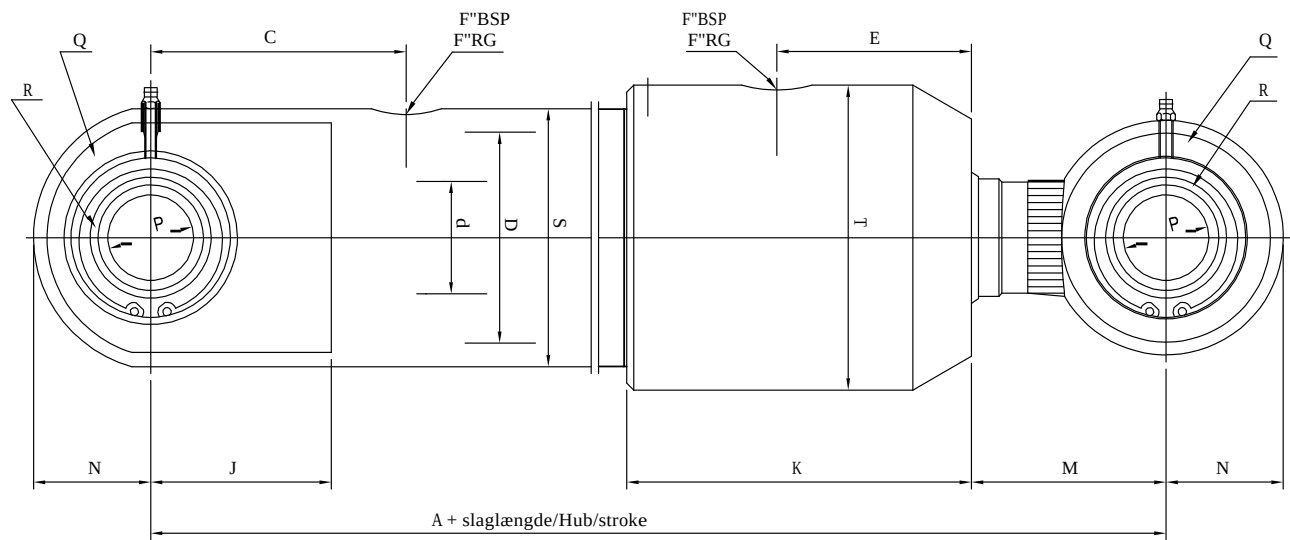



Målskema/Maßtabelle/Dimension table

NH21-S

D/d	A	N	M	E	S	T	P	J	Q	F	C	R	K	Lmin.
40/20	215	25	48	48,5	50	64	20	38	20	3/8"	54	16	102	10
40/25	215	25	48	48,5	50	64	20	38	20	3/8"	54	16	102	10
50/25	252	30	67	54,5	60	78	25	45	25	3/8"	67	20	109	15
50/35	252	30	67	54,5	60	78	25	45	25	3/8"	67	20	109	15
63/30	282	35	77	61	73	88	30	51	30	1/2"	75	22	121	15
63/40	282	35	77	61	73	88	30	51	30	1/2"	75	22	121	15
80/40	312	40	87	71	90	107	35	61	40	1/2"	85	25	130	15
80/50	312	40	87	71	90	107	35	61	40	1/2"	85	25	130	15
100/50	352	50	83	83	110	130	45	77	50	1/2"	109	32	147	20
100/65	352	50	83	83	110	130	45	77	50	1/2"	109	32	147	20

Alle angivne mål er i (mm). Ret til ændringer forbeholdes.

Alle angegebenen Maße sind in (mm). Wir behalten uns das Recht auf Änderungen vor.

Unless otherwise specified, all dimensions are in (mm). Right to alterations reserved.

Lmin. = min. slaglængde/mindesthub/min. stroke





Specification form 3

Order code NH21

NH21-X-X-D/d x L-X-X

Model:							
Basic types:							
Blank: No mounting							
S: Spherical bearing							
A: Fixed mounting							
Function:							
D: Double acting							
E1: Single acting, compressive							
E2: Single acting, tractive							
Bore:							
Piston rod diameter:							
Stroke:							
Digit: Length of spacer bush							
Digit: in() = pistonrod extension							

Piston rod mounting:
A: Fixed mounting
S: Spherical bearing






D/d \ L	50	100	150	200	250	300	350	400	500	600	700	800
40/20	●	●	●	●								
40/25				●	●	●	●	●				
50/25		●	●	●	●	●	●	●	●			
50/35								●	●	●	●	
63/30		●	●	●	●	●	●	●	●	●		
63/40								●	●	●	●	●
80/40				●	●	●		●	●		●	
80/50							●	●	●	●	●	●



Anvendelse/Use/Anwendung

NH21 + NH25

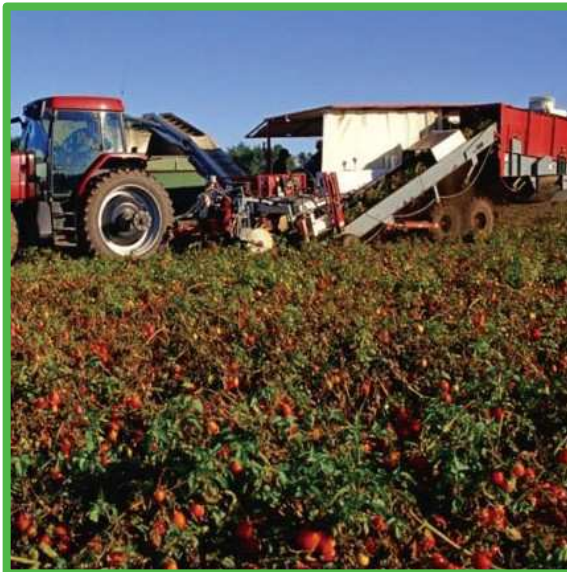



Dutch Hydraulic Consultants	Tel.	+31-(0)6-83695868
Achterweg ZZ 8	Mail	info@dhc-hydraulic.nl
3216AB Abbenbroek	Web	www.dhc-hydraulic.nl
Nederland		

