



Rotary Couplings


HANSA · TMP srl




Special Rotary Couplings

Rotary Coupling for Excavator

- 16 passages
- Pressure up to 400 bar
- With centre bore

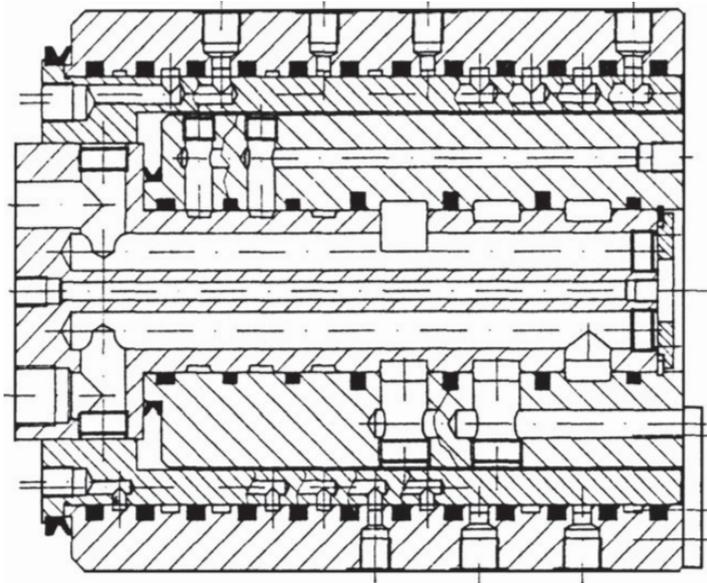
**Special Rotary Coupling for Machine Tools**

- Pressure up to 315 bar
- Speed max. 150 n / min.

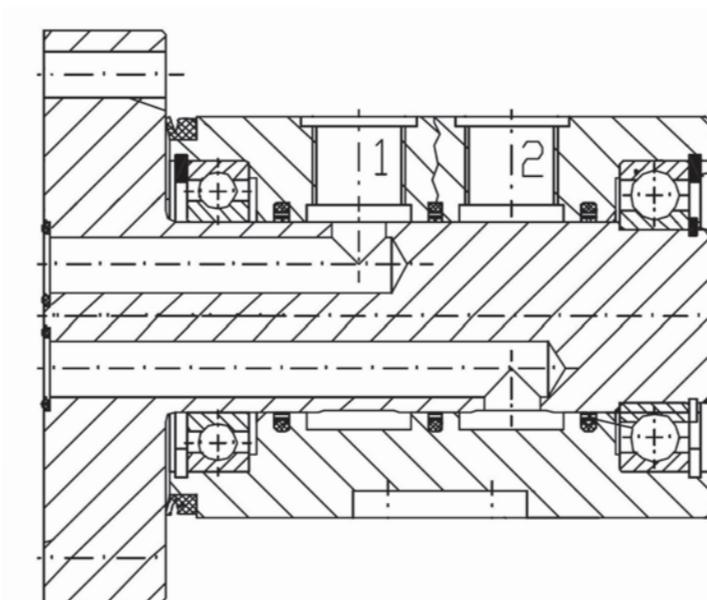


Rotary Coupling for Pipe-Laying Machine

- Pressure up to 500 bar
- Speed up to 15 n / min.
- With centre bore 400 mm diam.

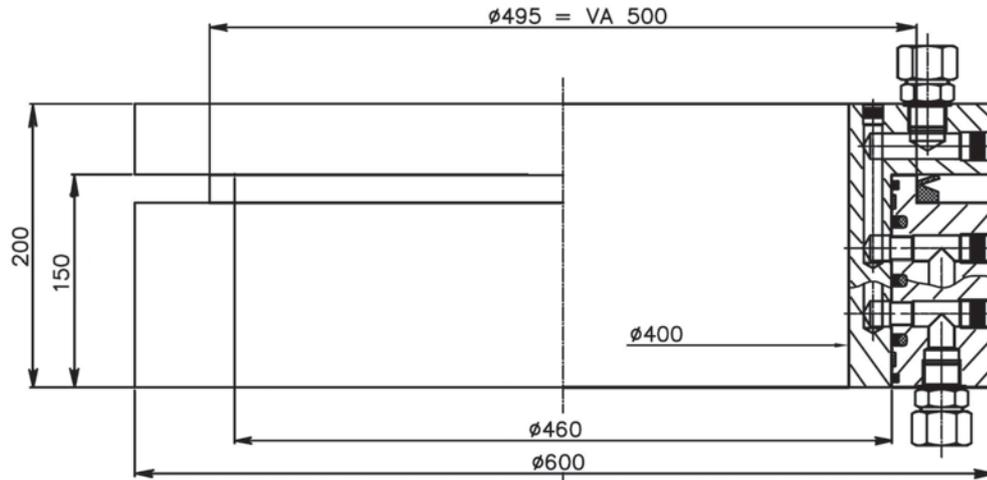


Special Rotary Coupling for Oil Rig

- Port 1 - 4 - 3/4" BSP - Hydraulic oil - Pressure 150 bar
- Port 5 - 1/4" BSP - Separation set
- Port 6 - 9 - 1/4" BSP - Air - Pressure 8 bar
- Max. speed = 150 n / min.
- With centre bore 230 mm. diam.
- Surface finish - Chemical nickel plating

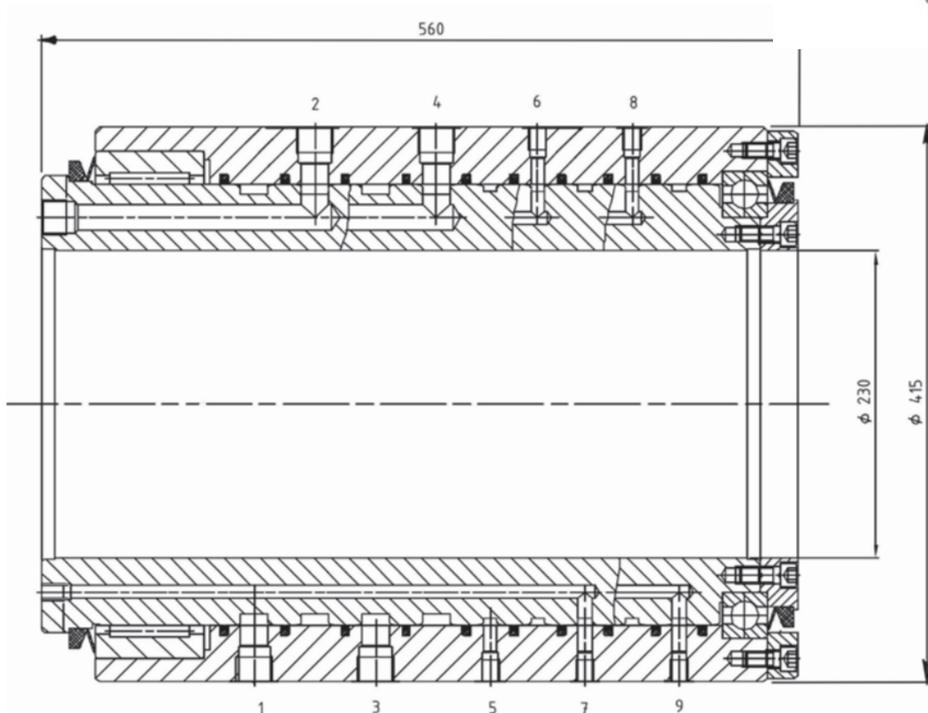


Special Rotary Coupling for Off-Shore Applications with Ball Swivels 4"

- Working pressure up to 550 bar
- Test pressure 800 bar
- Nominal size 100 mm.
- Rotation possibility with pressure 550 bar
- Max. angle $15^\circ + 15^\circ$
- **Made in STAINLESS STEEL**

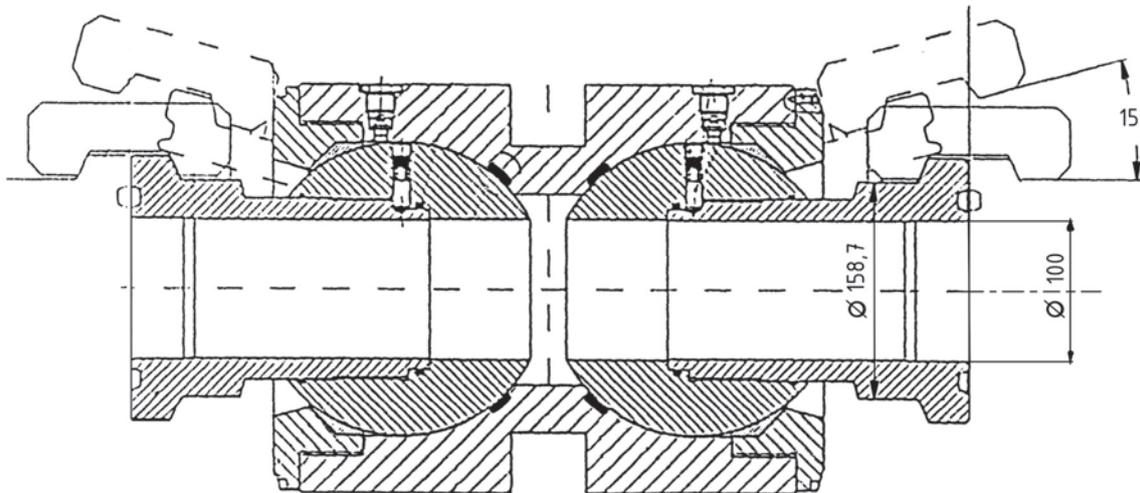

Straight Hydraulic Rotary Coupling for Off-Shore Applications

- Working pressure up to 550 bar
- Test pressure 800 bar
- Nominal size 100 mm.
- Rotation possibility with pressure 550 bar
- **Made in STAINLESS STEEL**

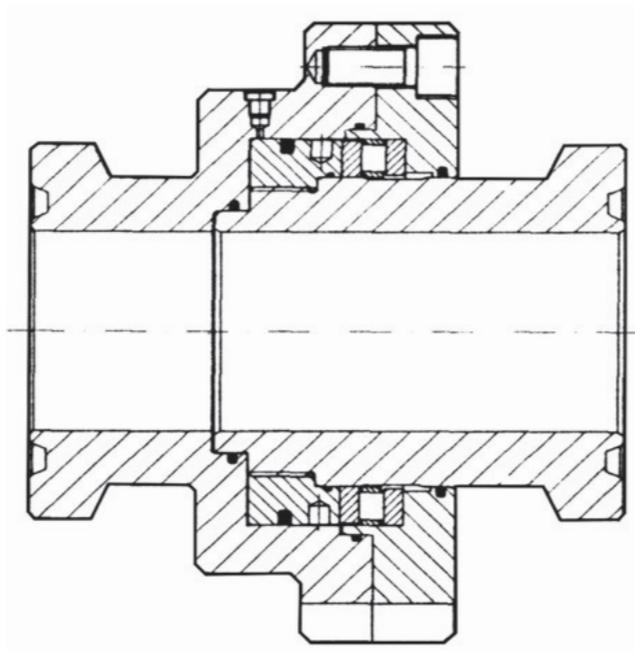

As HANSA-TMP has a very extensive range of products and some products have a variety of applications, the information supplied may often only apply to specific situations.

If the catalogue does not supply all the information required, please contact HANSA-TMP.

In order to provide a comprehensive reply to queries we may require specific data regarding the proposed application.

Whilst every reasonable endeavour has been made to ensure accuracy, this publication cannot be considered to represent part of any contract, whether expressed or implied.

HANSA-TMP reserves the right to amend specifications at their discretion.



Dutch Hydraulic Consultants	Tel.	+31-(0)6-83695868
Achterweg ZZ 8	Mail	info@dhc-hydraulic.nl
3216AB Abbenbroek	Web	www.dhc-hydraulic.nl
Nederland		