




MANUFACTURING

THE PRODUCTION LINE OF HANSA-TMP

HT 16 / M / 403 / 1110 / E

Variable Displacement Closed Loop System Axial Piston Pump

TPV 4200

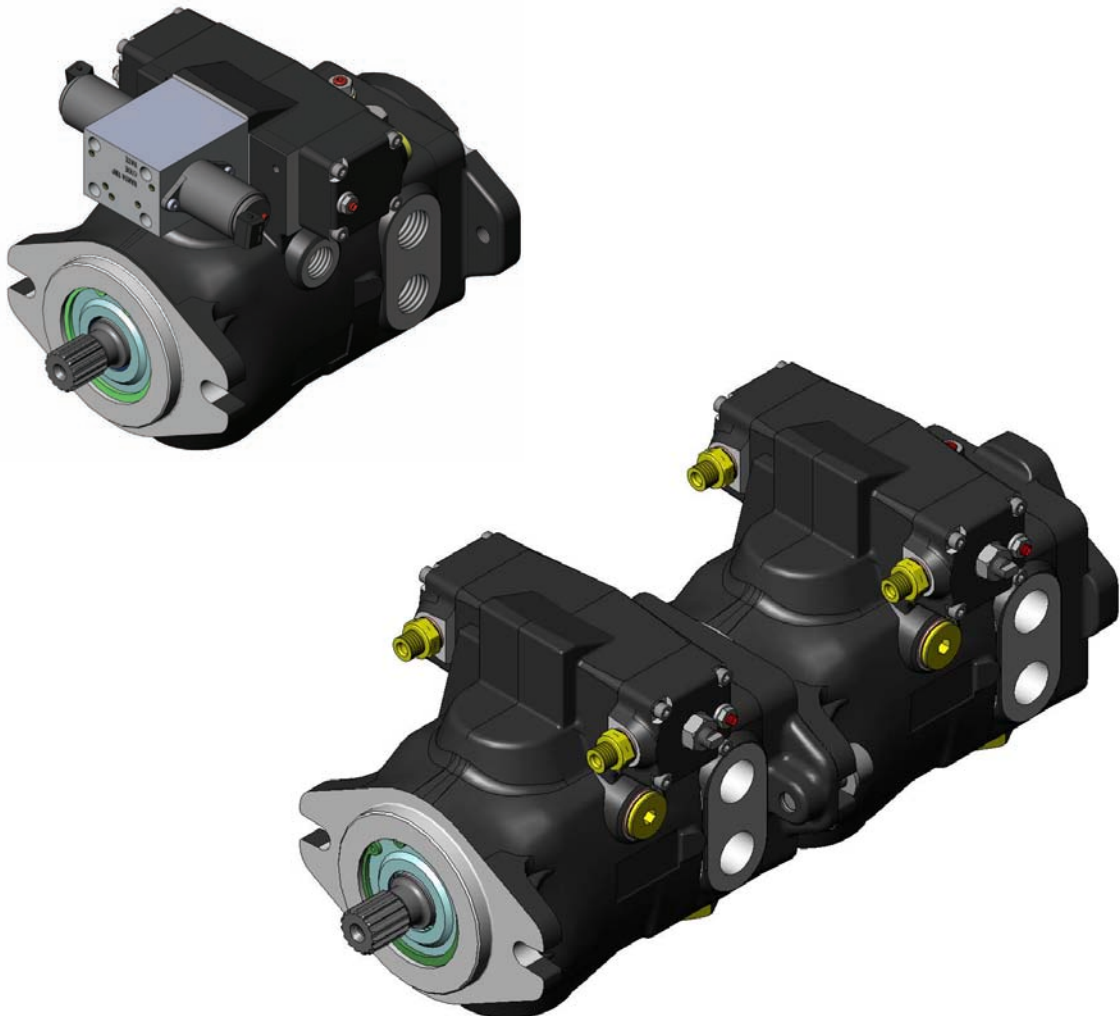


CONTENTS

General Information	4
Installation Instructions	5
Technical Specifications	6 - 7
Single Pump Installation Drawing	8
Tandem Pump Installation Drawing	9
Mounting Flanges and Shaft Details	10
Rear Pump Mounting Flanges	11
Control Devices	12 - 14
Order Code	16 - 17
Accessories	18

DESCRIPTION

TPV models are variable displacement axial piston pumps, with swashplate system, for closed loop hydrostatic transmissions.

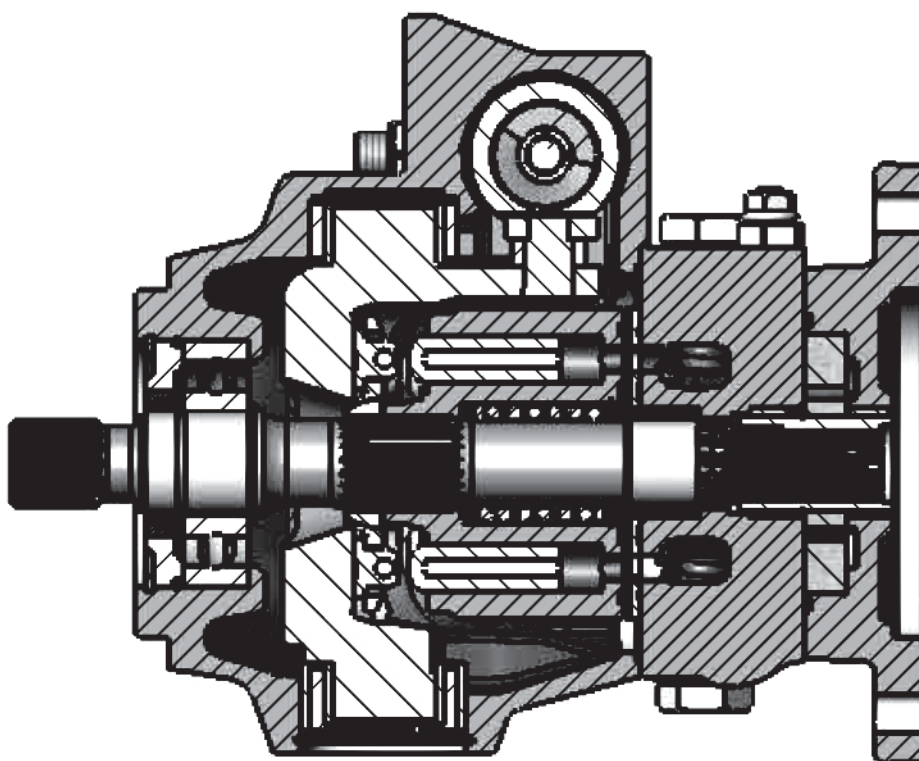

Features:

- Silent running
- High rotation speed
- Compact design
- Suitable for multiple pump assembly
- Easy maintenance
- Built-in pressure relief valves
- Optional: Electro-hydraulic constant power remote servo-control with or without automotive and special versions

All HANSA-TMP TPV pumps are tested dynamically and statically to ensure the quality of our products.

Installation Instruction

- During the assembly, check that pump is in line and concentric with the drive shaft sleeve to prevent overloading of the pump shaft bearing.
- Clean carefully all tanks and pipes internally before assembly.
- The pipe internal diameters must be suitable for the max oil speed through them.
- It is advisable to fit the pump lower than oil level of tank.
- Heat exchangers must be considered in the machine design, to keep temperature level within the limit of 80°C.

Multiple Pumps

- In case of installing multiple pump it is advisable to mount a supplementary support (see Optional SP).

Attention: connect the support to the engine and/or use an elastic support.

Maximum Shaft Torque

In the case of installation of multiple pump, verify that the total shaft torque is not more than the maximum value rated for each shaft type.

Control Devices

The TPV pumps can be supplied in different versions, with different types of shaft and equipped with different types of control devices:

- Hydraulic Remote Servo-Control **SHI**
- Electro-Hydraulic Remote Servo-Control **SEI 1.1** (12 V dc)
- Electro-Hydraulic Remote Servo-Control **SEI 2.1** (24 V dc)

Optional

- Full resistant front bearing **RB**
- Screw By-pass **SB**
- Multiple pump support **SP**

First Starting

- Before starting fill all the system components with new and filtered oil.
- Verify that the charge pressure is correct.
- Restore the tank oil level.

Maintenance

- The first oil change must be made after approximately 500 hours of operations, and then every 2000 hours.
- The filter cartridge must be replaced the first time after 50 hours and then every 500 hours; such time should be reduced when the filter clogging indicator shows that the cartridge is clogged or when the system works in a heavily polluted environment.

SPECIFICATIONS

Pump Model			TPV 32	TPV 38	TPV 45	TPV 50
Theoretical max. displacement	$V_{\max.}$	cm ³ /min.	32	38	45	50
Flow rating ⁽¹⁾	Q	l/min.	115	137	162	180
Power rating ⁽¹⁾	W	kW	48	57	67,5	75
Charge pump displacement	V_{bp}	cm ³ /n		14		
Rated pressure	$P_{\text{nom.}}$	bar		280		
Max. pressure	$P_{\text{max.}}$	bar		320		
Charge pressure ⁽²⁾	P_{bp}	bar		15-26		
Absolute suction pressure ⁽³⁾	P_s	bar		>= 0,8		
Cold start absolute suction pressure	P_{s1}	bar		>= 0,5		
Max. case pressure	P_{case}	bar		1,5		
Moment of inertia	J	kgm ²		0,0029		
Minimum speed	$n_{\text{min.}}$	n/min.		700		
Rated speed	$n_{\text{max-cont.}}$	n/min.		3.600		
Max. speed	$n_{\text{max-int.}}$	n/min.		3.900		
Max. fluid temperature	T	°C		80		
Fluid viscosity	ν	mm ² /sec.		15-35		
Fluid contamination			18/15 according ISO 4406 (Class NAS 9)			
Mass (single pump with hydr-servo)	m	kg		24		
Mass (tandem pump with hydr-servo)	m	kg		49,5		


(1) [$V_{\max.}$ - $n_{\max.}$]

(2) 1500 n/min.


(3) $\nu \leq 30$ mm²/s

PERFORMANCE (Indicative data)

Power at 280 bar (max. displacement)

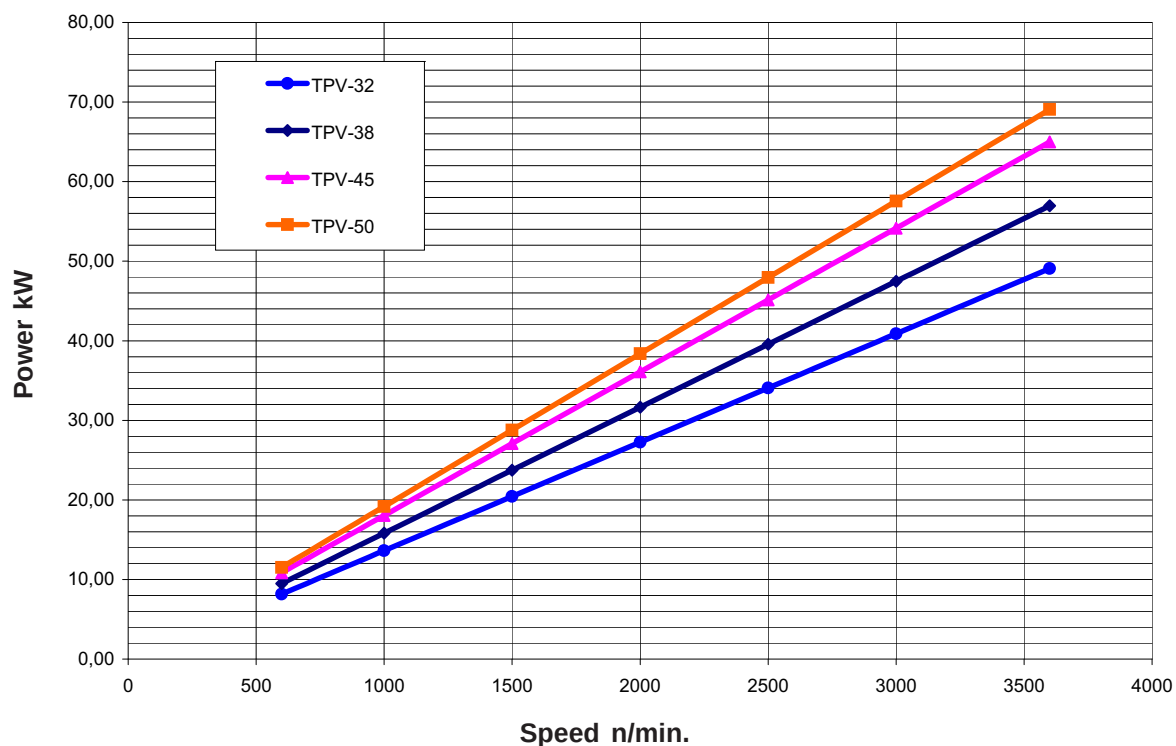


Outlet Flow at 280 bar (max. displacement)

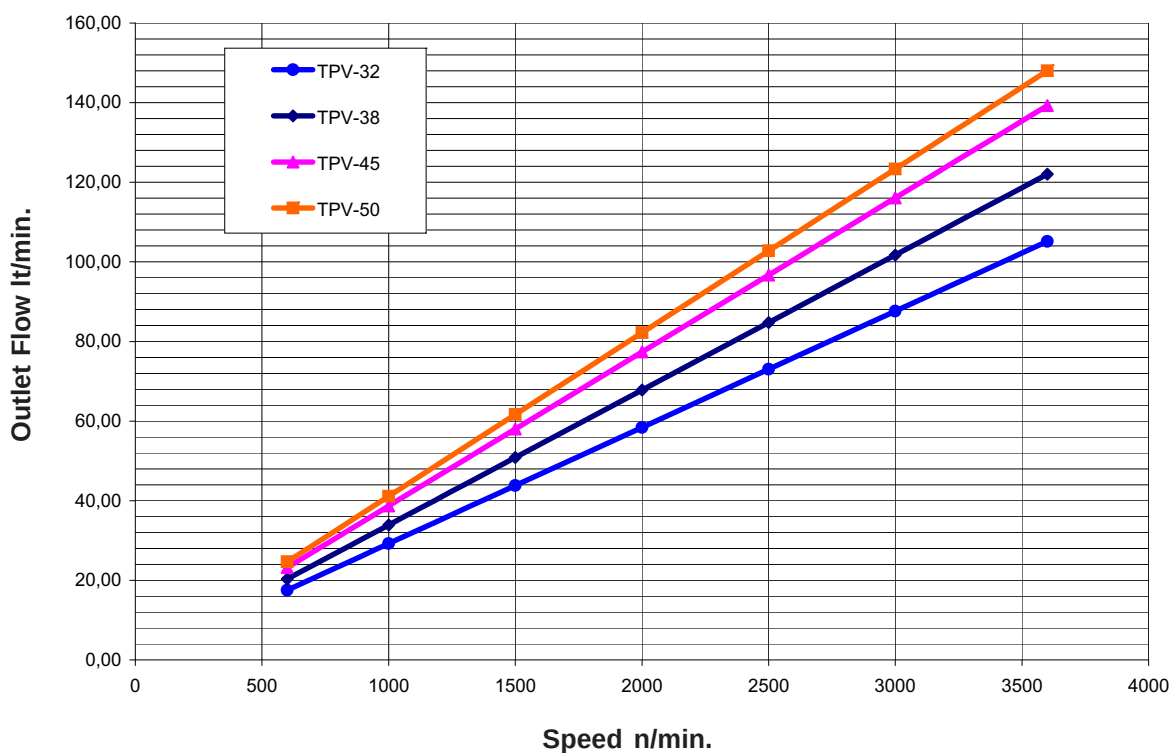


SINGLE PUMP - Hydraulic Remote Servo-Control

INSTALLATION DRAWING

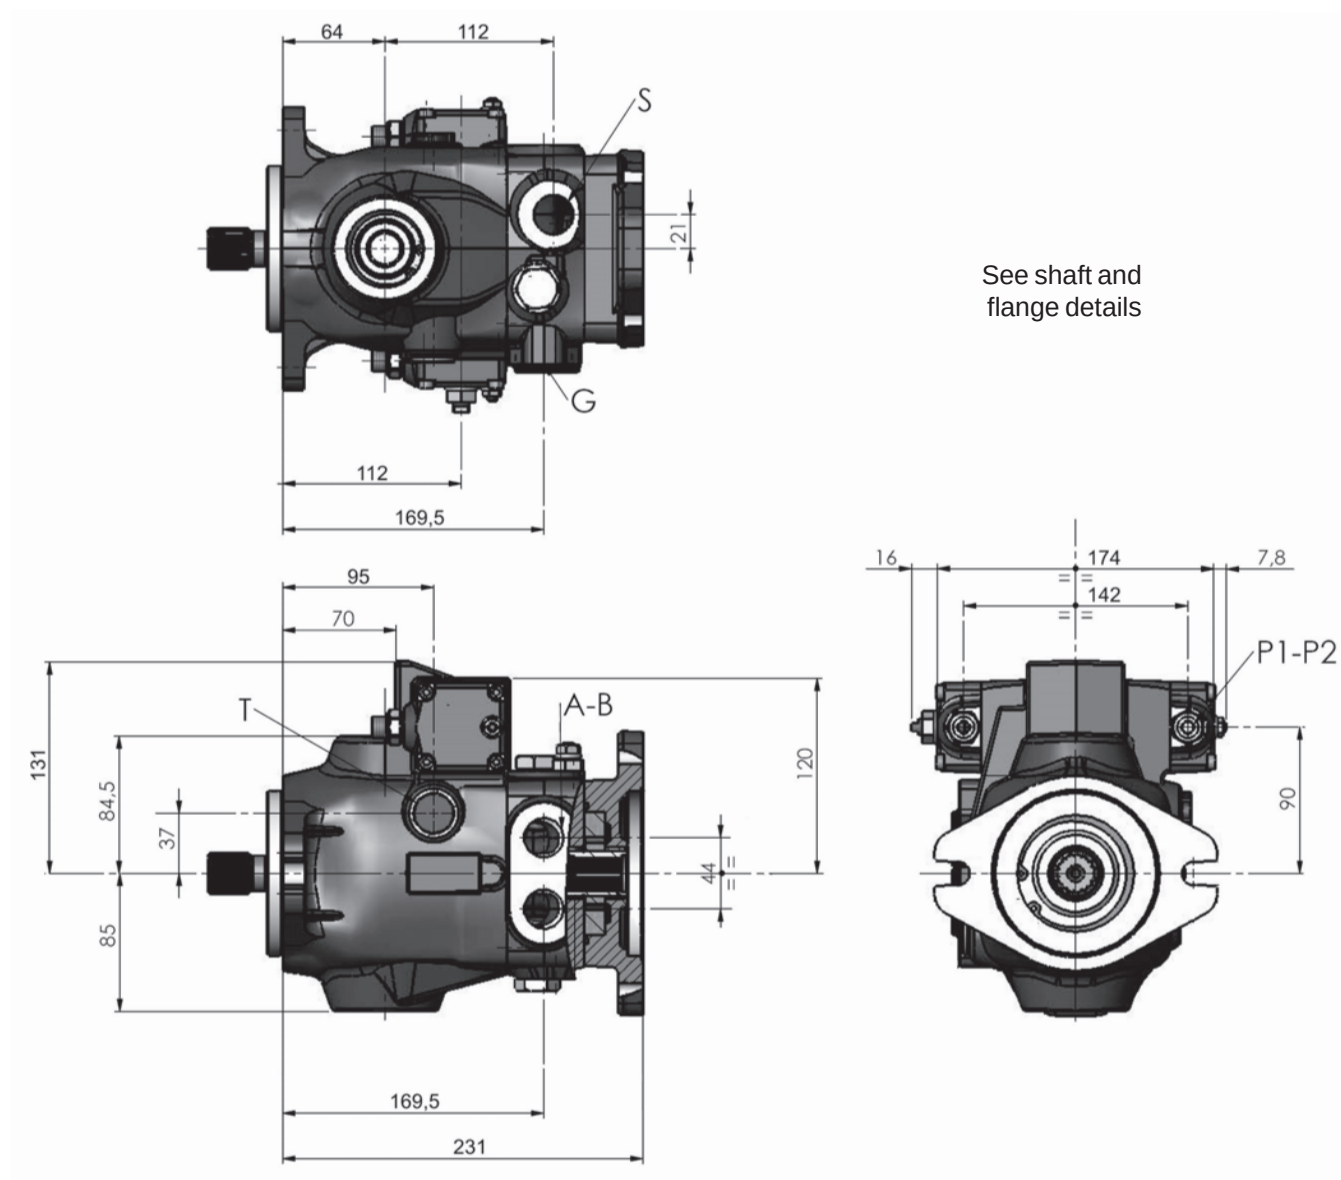


Hydraulic diagram

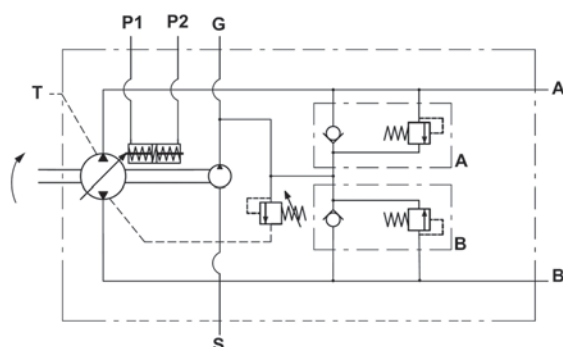





TPV 4200 CONNECTIONS

A-B	SERVICES	3/4" BSP
T	DRAIN	1/2" BSP
S	SUCTION	3/4" BSP
G	CHARGE SYSTEM	1/4" BSP
P1-P2	SERVO CONTROL PORTS	1/4" BSP

TANDEM PUMP - Hydraulic Remote Servo-Control INSTALLATION DRAWING

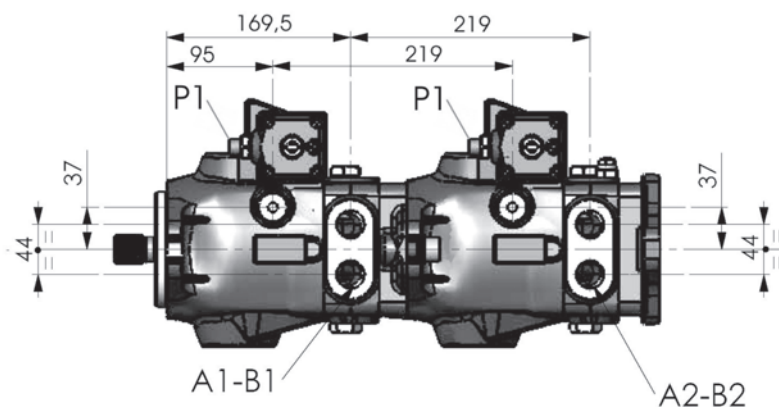


See shaft and
flange details

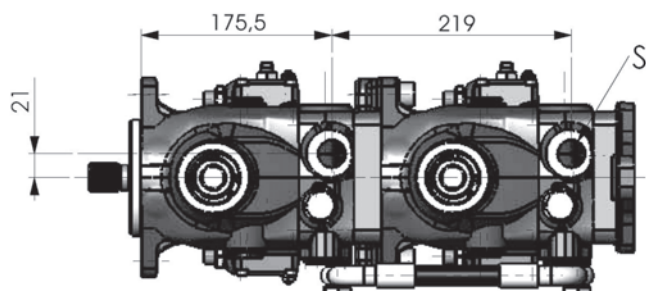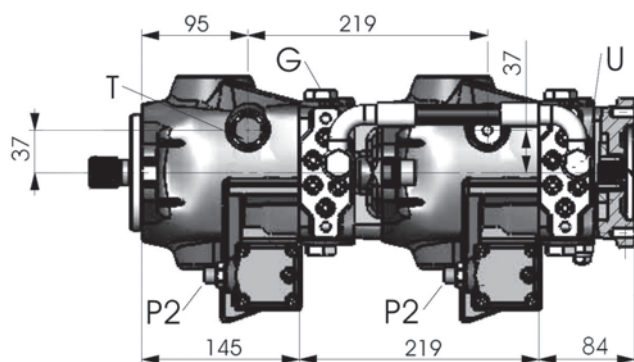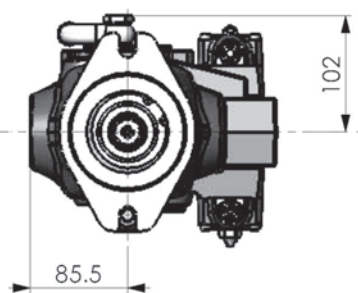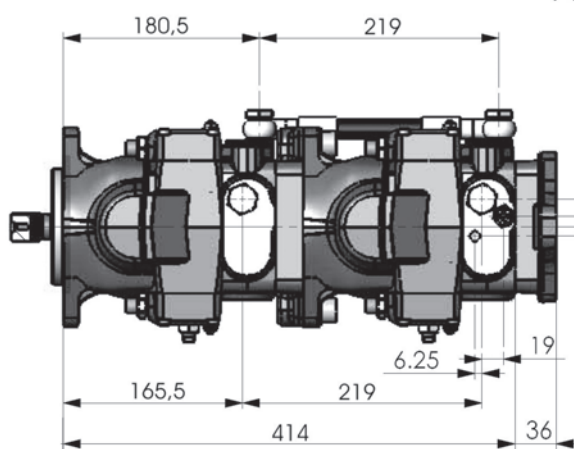

TPVT 4200 CONNECTIONS

A1-B1	SERVICES	3/4" BSP
A2-B2	SERVICES	3/4" BSP
T	DRAIN	1/2" BSP
S	SUCTION	3/4" BSP
G	CHARGE SYSTEM	1/4" BSP
U	GAUGE PORTS	1/8" BSP
P1-P2	SERVO CONTROL PORTS	1/4" BSP


Hydraulic diagram

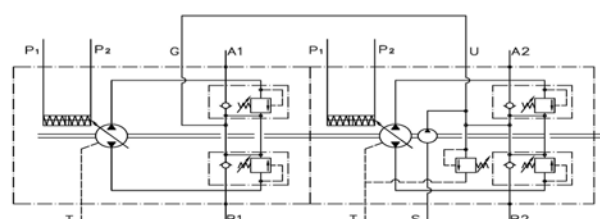

Mounting Flange and Shaft Options

FLANGES


SAE B - 2 holes flange **F2**

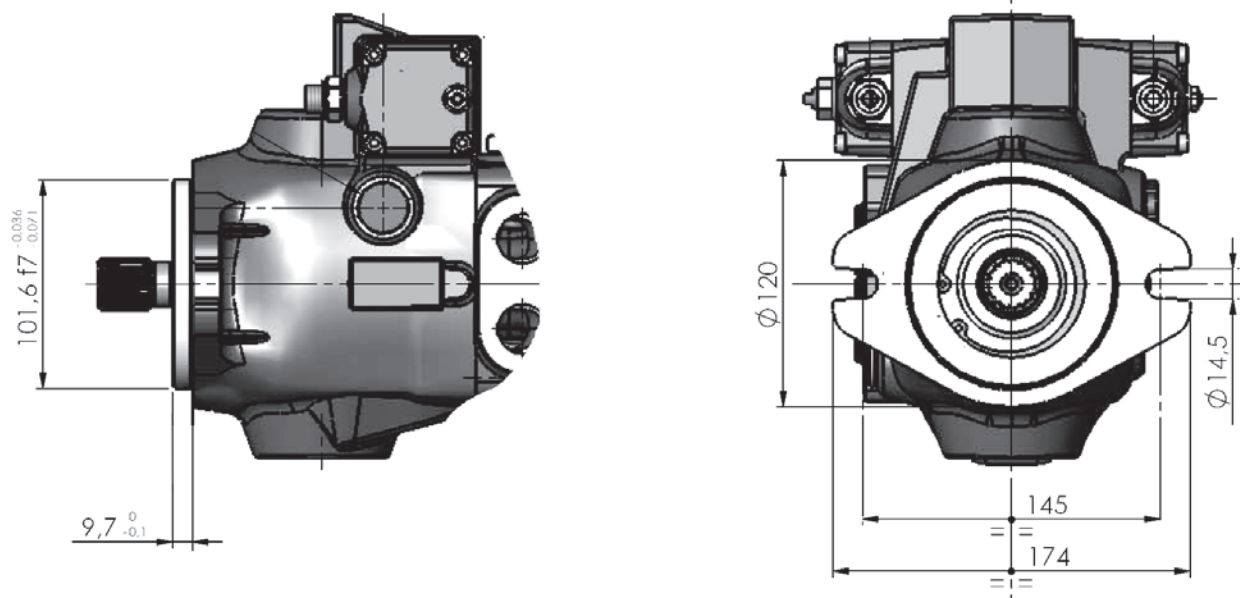

SHAFT

Splined shaft Z = 15 **SS5**

Max. torque = 360 Nm


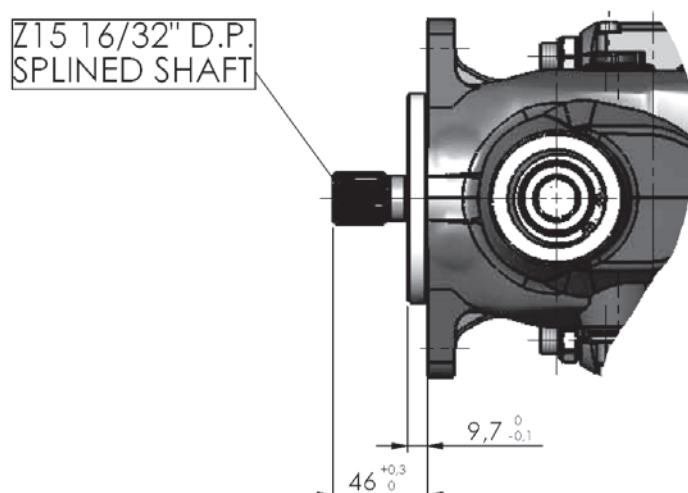


Attention: for the application of multiple pumps the total absorbed torque must not exceed the indicated value.

REAR PUMP FLANGE CONNECTIONS (Pump with Hydraulic Remote Servo-Control)



SAE A - 4 holes **SA**

Max. torque = 80 Nm

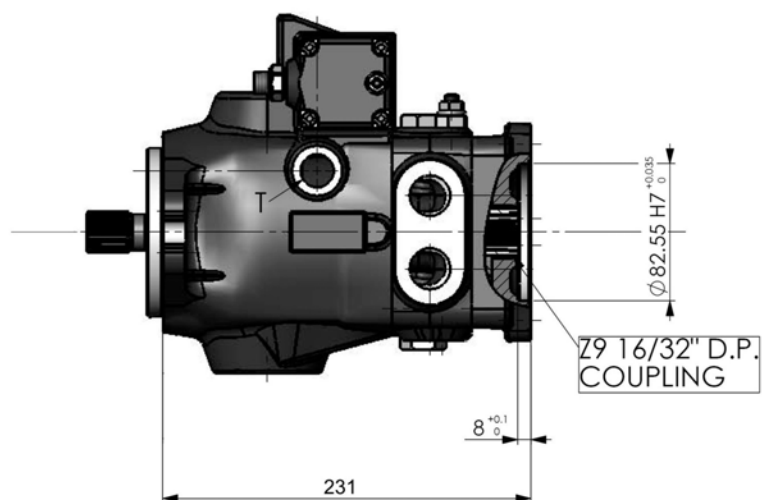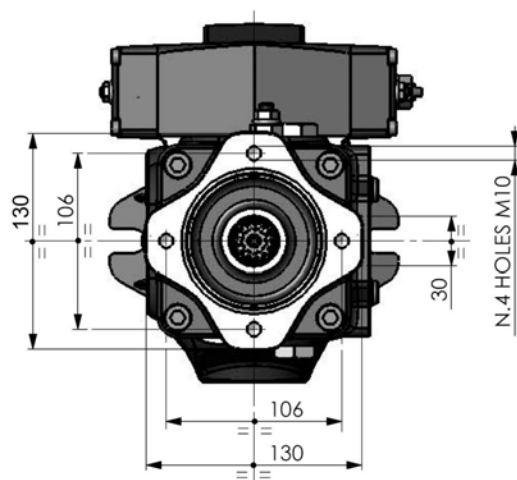

SAE B - 2 holes **SB**


Max. torque = 230 Nm

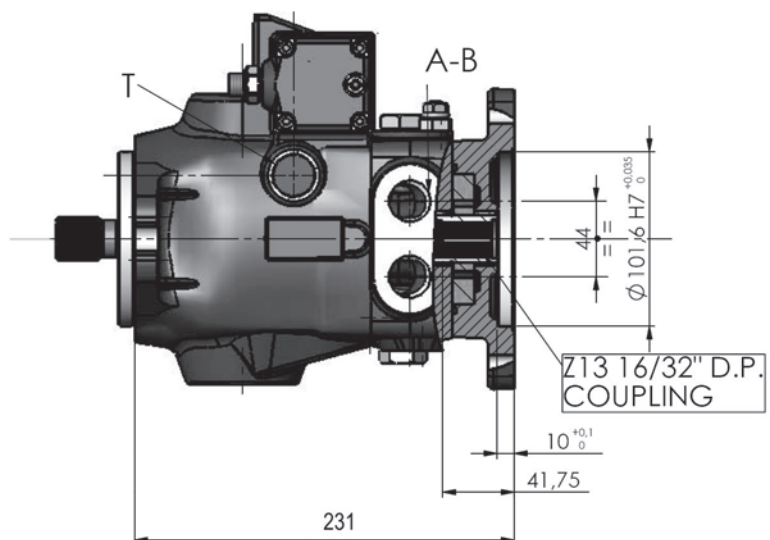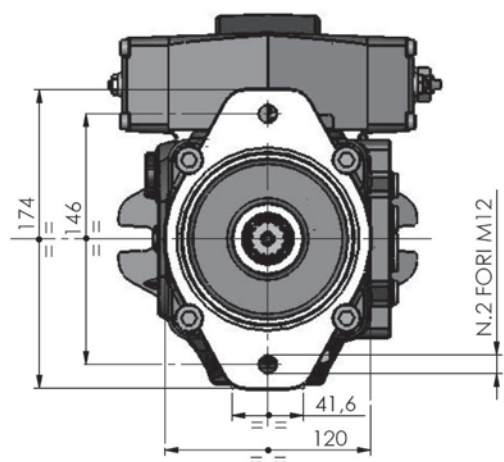


CONTROL DEVICES

Hydraulic Remote Servo-Control SHI

The displacement pump variation is obtained by adjusting the pressure on the P1 and P2 servo control connections by means of a hydraulic proportional joystick (containing pressure reducing valves). The servo control supply can be obtained by taking pressure from the charge pump (G connection). The servo control return time can be adjusted by inserting a restrictor on the joystick supply line. The servo control operation curve in both control directions goes from 10 to 25 bar (tolerance +- 5%) The adjustment curve of the hydraulic joystick has to be (10-25 bar) plus with final step.

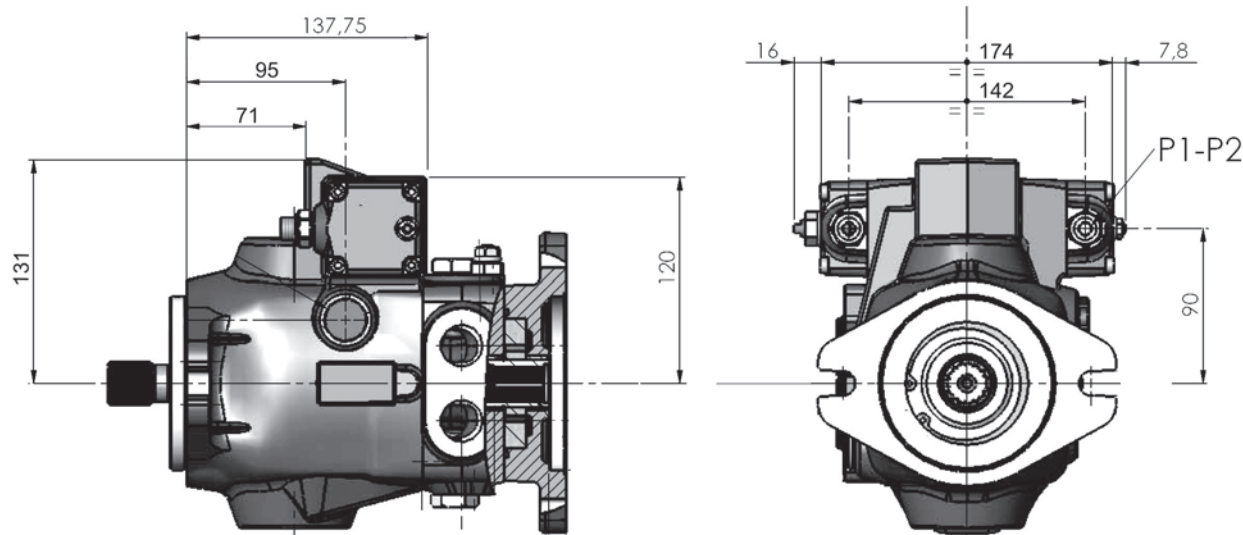

Hydraulic diagram

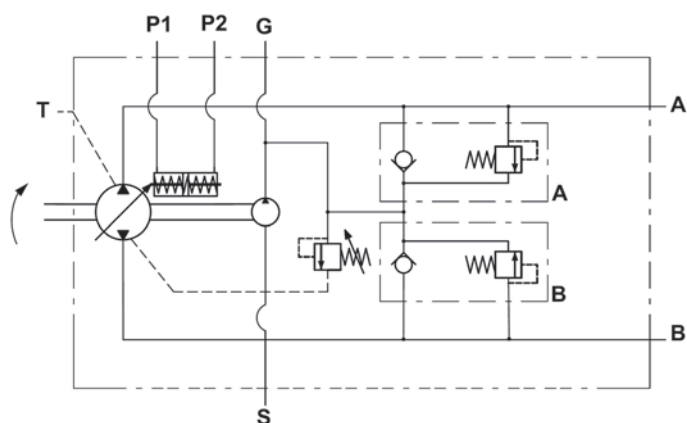

TPV 4200 CONNECTIONS

A-B	SERVICES	3/4" BSP
T	DRAIN	1/2" BSP
S	SUCTION	3/4" BSP
G	CHARGE SYSTEM	1/4" BSP
P1-P2	SERVO CONTROL PORTS	1/4" BSP

Hydraulic Remote Servo-Control Position

OA




OB




CONTROL DEVICES

Electro-Hydraulic Remote Servo-Control SEI...

The pump displacement variation is obtained by an electric signal, which varies from 0 to 750 mA (supply voltage 24 V dc) or from 0 to 1500 mA (supply voltage 12 V dc).

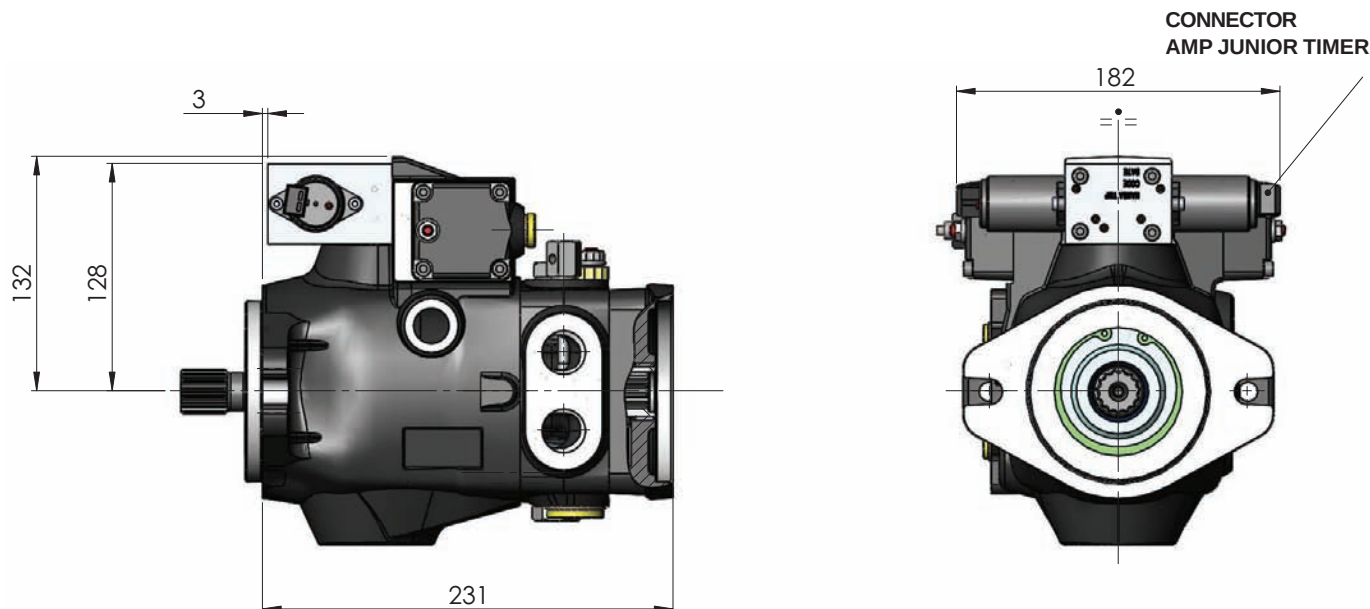

Hydraulic diagram

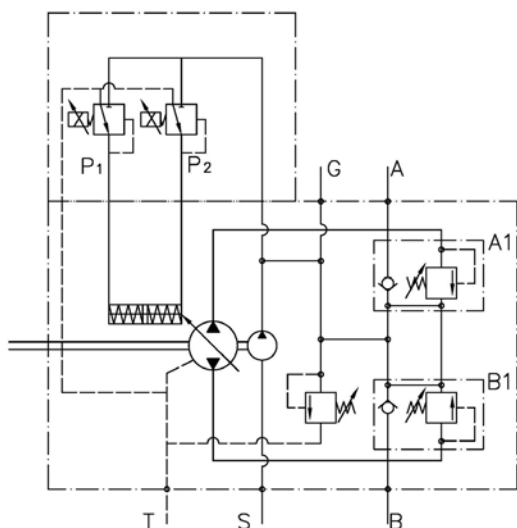

Electric characteristics

SPECIFICATIONS	
Max. pressure	35 bar
Sealing	NBR
Available voltage	12 - 24V DC
Coil resistance	12V 5,0 ± 6% Ω 24V 19,6 ± 6% Ω
Max. current 12V DC	1500 mA
Max. current 24V DC	750 mA
Hysteresis	< 0,5 bar
PWM	100 Hz
Protection index with connector	IP 65

Electro-Hydraulic Remote Servo-Control Position

OA



OB


(Available on request, please, contact our Technical Department for details).

CONTROL DEVICES


Electro-Hydraulic Remote Servo-Control **SEI...**

Characteristic Curves

Pressure Reducing Valve Modulation

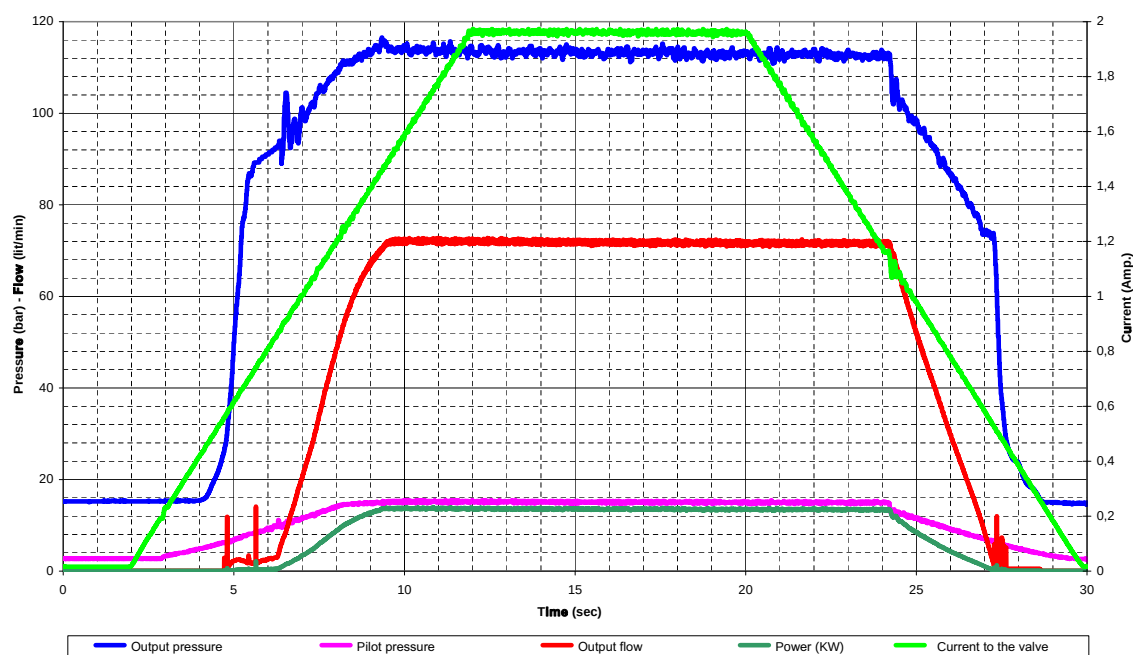

Reaction Time with On-Off Current

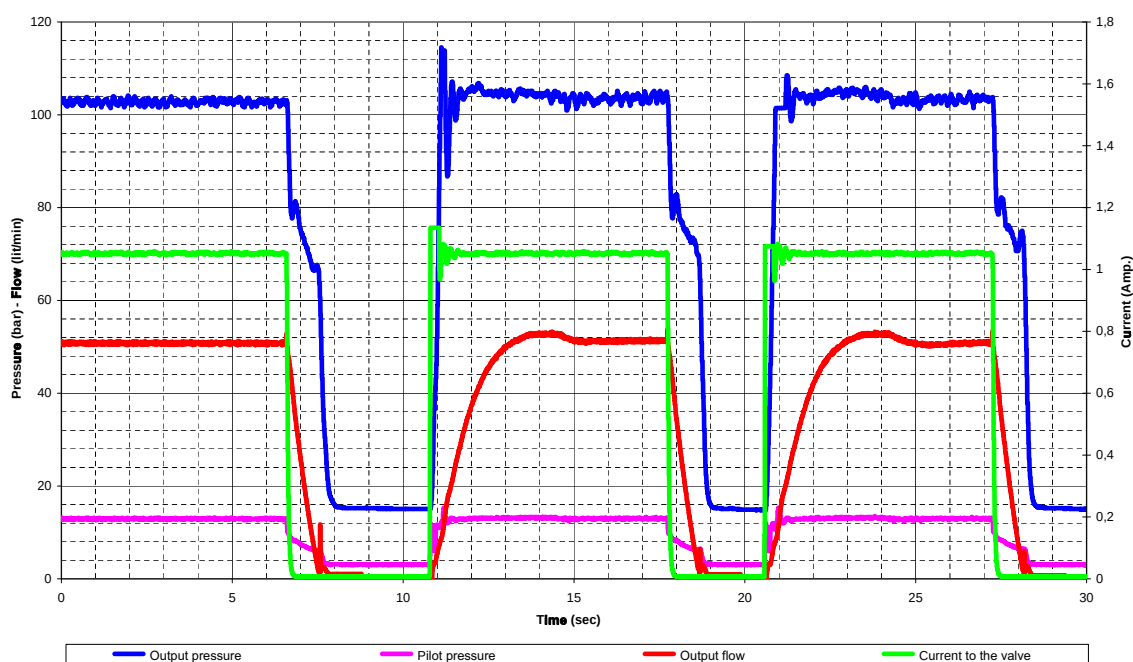

This page has been deliberately left blank

ORDER CODE

4200	TPV	32	-	CR	SS5	F2	SHI	OA	-	15	00	C	000	00
0	1	2	3	4	5	6	7	8	9	10	11	12	13	14

Pag.

0 - Pump series

4200 = TPV pump 4200

1 - Pump model

TPV = Closed loop circuit single pump

8

TPVT = Closed loop circuit tandem pump

9

2 - Pump displacement (single or primary pump)

6

32 = 32 cm³/n

38 = 38 cm³/n

45 = 45 cm³/n

50 = 50 cm³/n

3 - Tandem pump displacement (secondary pump)

6

32 = 32 cm³/n

38 = 38 cm³/n

45 = 45 cm³/n

50 = 50 cm³/n

4 - Pump rotation (shaft end view)

CR = Clockwise Rotation (right)

5 - Shaft (mounting side)

10

SS5 = Splined shaft Z 15 - 16 / 32 D.P.

6 - Mounting side flange

10

F2 = SAE B 2 holes - pilot diam. 101,6 mm.

7 - Control devices

SHI = Hydraulic remote servo-control

12

SEI1.1 = Electro-hydraulic remote servo-control (12 V dc)

13 - 14

SEI2.1 = Electro-hydraulic remote servo-control (24 V dc)

13 - 14

8 - Control devices position (single or primary pump)

12 - 13

OA = Position A

OB = Position B (for SEI... versions available on request, please, contact our technical department for details)

9 - Control devices position (secondary pump)

12 - 13

OA = Position A

OB = Position B (for SEI... versions available on request, please, contact our technical department for details)

ORDER CODE

Pag.

10 - Relief valve pressure setting

15	= 150 bar
18	= 180 bar
20	= 200 bar
25	= 250 bar
30	= 300 bar
35	= 350 bar

11 - Charge pump

00	= Without charge pump
10	= Standard charge pump 10 cm ³ /n - pressure 16 bar (1500 n/min) for single pump
14	= Standard charge pump 14 cm ³ /n - pressure 16 bar (1500 n/min) for tandem pump

12 - Rear pump connection option

C	= Closed (without rear fitting)
SA	= SAE A 4 holes mounting flange (female shaft)
SB	= SAE B 2 holes mounting flange (female shaft)

11**11****13 - Auxiliary gear pump displacement**

000	= Without pump
------------	----------------

Group 2 SAE A

S 204 = 4,2 cm ³ /n	S 206 = 6,0 cm ³ /n	S 209 = 8,4 cm ³ /n	S 211 = 10,8 cm ³ /n
S 214 = 14,4 cm ³ /n	S 217 = 16,8 cm ³ /n	S 219 = 19,2 cm ³ /n	S 222 = 22,8 cm ³ /n
S 226 = 26,2 cm ³ /n	S 230 = 30,0 cm ³ /n	S 240 = 40,0 cm ³ /n	

Group 3 SAE B

S 315 = 15,0 cm ³ /n	S 318 = 18,0 cm ³ /n	S 321 = 21,0 cm ³ /n	S 327 = 27,0 cm ³ /n
S 332 = 32,0 cm ³ /n	S 338 = 38,0 cm ³ /n	S 343 = 43,0 cm ³ /n	S 347 = 47,0 cm ³ /n
S 351 = 51,0 cm ³ /n	S 354 = 54,0 cm ³ /n	S 361 = 61,0 cm ³ /n	S 364 = 64,0 cm ³ /n
S 370 = 70,0 cm ³ /n	S 374 = 74,0 cm ³ /n	S 390 = 90,0 cm ³ /n	

14 - Optional

00	= Without optional
RB	= Full resistant front bearing
SB	= Screw by-pass
SP	= Multiple pump support



ACCESSORIES**Hydraulic Gear Pump Gr2 - SAE A - 2 Holes SA**

For more detailed information ask for
catalogue HT 15 / F / 200 / 0703 / E

Flanges and Couplings for Gasoline and Diesel Engines

GASOLINE OR DIESEL ENGINES

FLANGES AND COUPLINGS

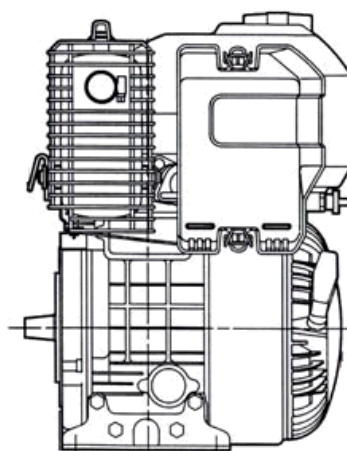

For more detailed information ask for catalogue HT 39 / D / 101 / 1206 / IE

As HANSA-TMP has a very extensive range of products and some products have a variety of applications, the information supplied may often only apply to specific situations.

If the catalogue does not supply all the information required, please contact HANSA-TMP.

In order to provide a comprehensive reply to queries we may require specific data regarding the proposed application.

Whilst every reasonable endeavour has been made to ensure accuracy, this publication cannot be considered to represent part of any contract, whether expressed or implied.

HANSA-TMP reserves the right to amend specifications at their discretion.



Dutch Hydraulic Consultants	Tel.	+31-(0)6-83695868
Achterweg ZZ 8	Mail	info@dhc-hydraulic.nl
3216AB Abbenbroek	Web	www.dhc-hydraulic.nl
Nederland		