

CILINDRI IDRAULICI

HYDRAULIC CYLINDERS





HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES


HANSA · TMP srl[®]

**Serie T44/160 Telescopico doppio effetto 4 sfili
per macchine da compattazione rifiuti.**

*4 Stages double acting telescopic cylinder
T44/160 Series for garbage baling machines.*

File: t44-160

01/1998

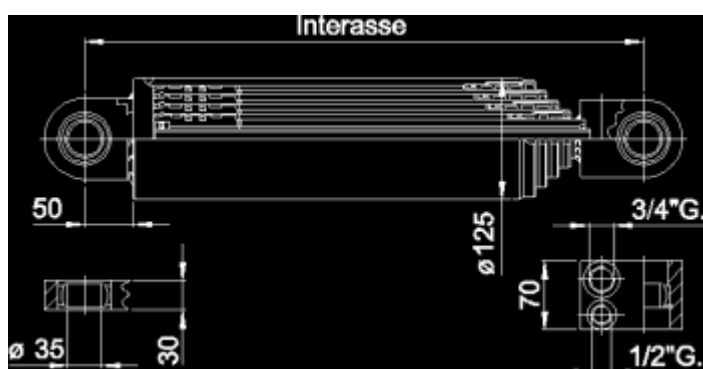

Sfilanti <i>Stages</i>	Kg <i>Spinta</i> <i>Kg Push</i>	Kg Tiro <i>Kg Pull</i>
1°sfili Ø100	15196 Kg	1000 Kg
2°sfili Ø 80	10174 Kg	
3°sfili Ø 60	6153 Kg	
4°sfili Ø 40	3139 Kg	


Pressione 160 bar
Pressure 160 bar

Si forniscono a richiesta dimensioni intermedie <i>Dimesions between these values can be supplied to order</i>			
Codice <i>Code</i>	Interasse <i>Closed</i>	Corsa <i>Stroke</i>	Aperto <i>Open</i>
T44/160/500	500	750	1250
T44/160/550	550	950	1500
T44/160/600	600	1150	1750
T44/160/650	650	1350	2000
T44/160/700	700	1550	2250
T44/160/750	750	1750	2500
T44/160/800	800	1950	2750
T44/160/850	850	2150	3000
T44/160/900	900	2350	3250
T44/160/950	950	2550	3500
T44/160/1000	1000	2750	3750
T44/160/1050	1050	2950	4000
T44/160/1100	1100	3150	4250
T44/160/1150	1150	3350	4500
T44/160/1200	1200	3550	4750
T44/160/1250	1250	3750	5000
T44/160/1300	1300	3950	5250
T44/160/1350	1350	4000	5350
T44/160/1400	1400	4200	5600
T44/160/1450	1450	4300	5750

**Serie T45/160 Telescopico doppio effetto 5 sfili
per macchine da compattazione rifiuti.**
5 Stages double acting telescopic cylinder
T45/160 Series for garbage baling machines.

File: t45-160

01/1998

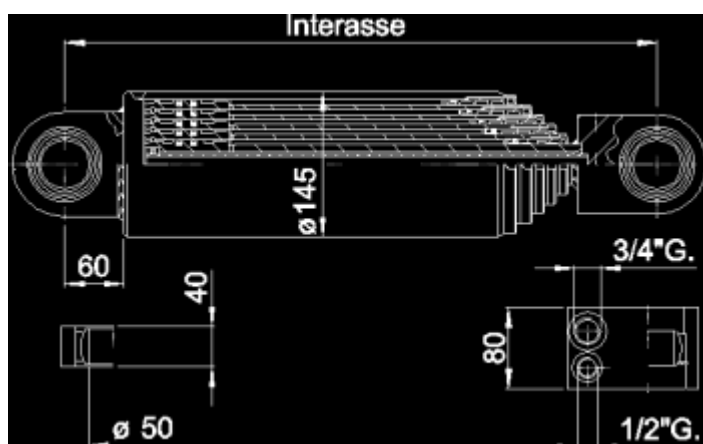

Sfilanti Stages	Kg Spinta Kg Push	Kg Tiro Kg Pull
1°sfili Ø120	21225 Kg	1000 Kg
2°sfili Ø100	15196 Kg	
3°sfili Ø 80	10172 Kg	
4°sfili Ø 60	6153 Kg	
5°sfili Ø 50	3139 Kg	

Pressione 160 bar
Pressure 160 bar

<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimesions between these values can be supplied to order</u>			
Codice Code	Interasse Closed	Corsa Stroke	Aperto Open
T45/160/600	600	1290	1890
T45/160/650	650	1540	2190
T45/160/700	700	1790	2490
T45/160/750	750	2040	2790
T45/160/800	800	2290	3090
T45/160/850	850	2540	3390
T45/160/900	900	2790	3690
T45/160/950	950	3040	3990
T45/160/1000	1000	3290	4290
T45/160/1050	1050	3540	4590
T45/160/1100	1100	3690	4790
T45/160/1150	1150	3940	5090
T45/160/1200	1200	4090	5290
T45/160/1250	1250	4340	5590
T45/160/1300	1300	4490	5790




HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES

HANSA · TMP srl

**Serie T46/160 Telescopico doppio effetto 6 sfili
per macchine da compattazione rifiuti.
6 Stages double acting telescopic cylinder
T46/160 Series for garbage baling machines.**

File: t46-160

01/1998

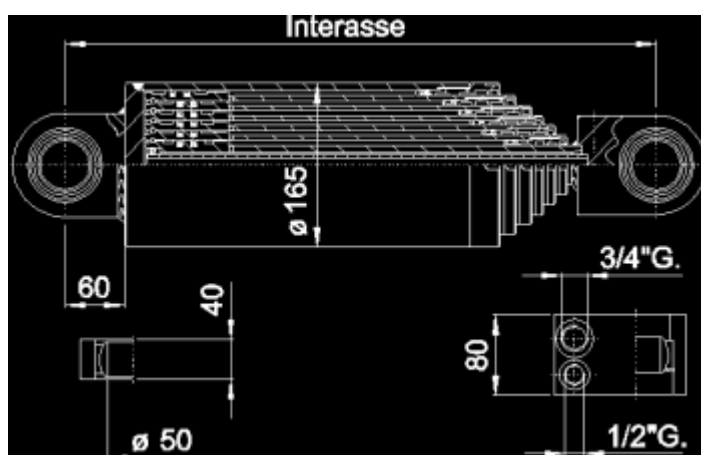

Sfilanti Stages	Kg Spinta Kg Push	Kg Tiro Kg Pull
1° sfili Ø140	28259 Kg	1000 Kg
2° sfili Ø120	21225 Kg	
3° sfili Ø100	15196 Kg	
4° sfili Ø 80	10172 Kg	
5° sfili Ø 60	6153 Kg	
6° sfili Ø 50	3139 Kg	

Pressione 160 bar
Pressure 160 bar


<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimesions between these values can be supplied to order</u>			
Codice Code	Interasse Closed	Corsa Stroke	Aperto Open
T46/160/600	600	1490	2090
T46/160/650	650	1790	2440
T46/160/700	700	2090	2790
T46/160/750	750	2390	3140
T46/160/800	800	2690	3490
T46/160/850	850	2990	3840
T46/160/900	900	3290	4190
T46/160/950	950	3590	4540
T46/160/1000	1000	3790	4790
T46/160/1050	1050	4040	5090
T46/160/1100	1100	4290	5390
T46/160/1150	1150	4590	5740
T46/160/1200	1200	4790	5990
T46/160/1250	1250	5040	6290
T46/160/1300	1300	5290	6590

**Serie T53/180 Telescopico doppio effetto 3 sfili
per macchine da compattazione rifiuti.**

*3 Stages double acting telescopic cylinder
T53/180 Series for garbage baling machines.*

File: t53-180

01/1998

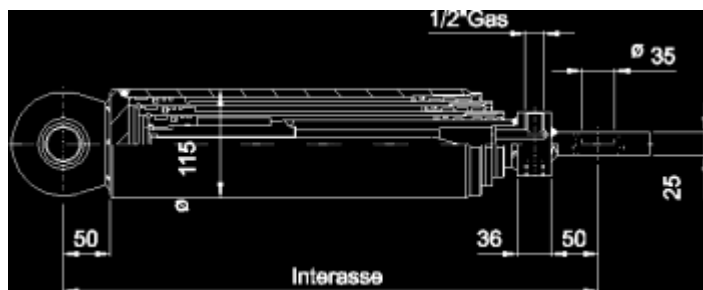

Sfilanti Stages	Kg Spinta Kg Push	Kg Tiro Kg Pull
1° sfili Ø 90	14130 Kg	1400 Kg
2° sfili Ø 70	9043 Kg	
3° sfili Ø 50	5087 Kg	

**Pressione 180 bar
Pressure 180 bar**

<u>Si forniscono a richiesta dimensioni intermedie</u> <i>Dimesions between these values can be supplied to order</i>			
Codice Code	Interasse Closed	Corsa Stroke	Aperto Open
T53/180/900	900	1680	2580
T53/180/950	950	1830	2780
T53/180/1000	1000	1980	2980
T53/180/1050	1050	2130	3180
T53/180/1100	1100	2280	3380
T53/180/1150	1150	2430	3580
T53/180/1200	1200	2580	3780
T53/180/1250	1250	2730	3980
T53/180/1300	1300	2880	4180
T53/180/1350	1350	3030	4380
T53/180/1400	1400	3180	4580
T53/180/1450	1450	3280	4780
T53/180/1500	1500	3430	4980
T53/180/1550	1550	3530	5080
T53/180/1600	1600	3680	5280




HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES

HANSA · TMP srl

**Serie T54/180 Telescopico doppio effetto 4 sfili
per macchine da compattazione rifiuti.
4 Stages double acting telescopic cylinder
T54/180 Series for garbage baling machines.**

File: t54-180

01/1998

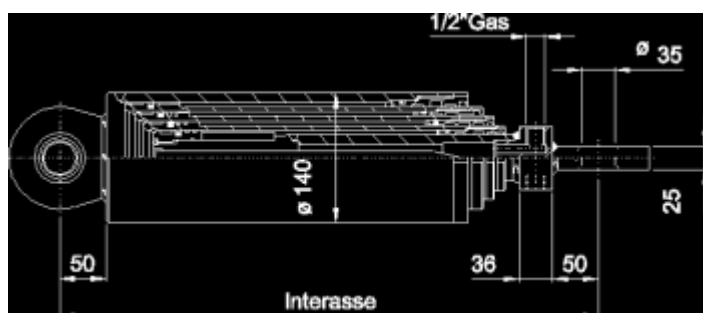

Sfilanti <i>Stages</i>	Kg <i>Spinta</i> <i>Kg Push</i>	Kg Tiro <i>Kg Pull</i>
1°sfili Ø110	20347 Kg	1400 Kg
2°sfili Ø 90	14130 Kg	
3°sfili Ø 70	9043 Kg	
4°sfili Ø 50	5087 Kg	

Pressione 180 bar
Pressure 180 bar

<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimesions between these values can be supplied to order</u>			
Codice <i>Code</i>	Interasse <i>Closed</i>	Corsa <i>Stroke</i>	Aperto <i>Open</i>
T54/180/800	800	1840	2640
T54/180/850	850	2040	2890
T54/180/900	900	2240	3140
T54/180/950	950	2440	3390
T54/180/1000	1000	2640	3640
T54/180/1050	1050	2840	3890
T54/180/1100	1100	3040	4140
T54/180/1150	1150	3240	4390
T54/180/1200	1200	3440	4640
T54/180/1250	1250	3640	4890
T54/180/1300	1300	3740	5040
T54/180/1350	1350	3940	5290
T54/180/1400	1400	4050	5450
T54/180/1450	1450	4250	5700
T54/180/1500	1500	4450	5950




HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES

HANSA · TMP srl

**Serie T63/160 Telescopico doppio effetto 3 sfili
per macchine da compattazione rifiuti.
3 Stages double acting telescopic cylinder
T63/160 Series for garbage baling machines.**

File: t63-160

01/1998

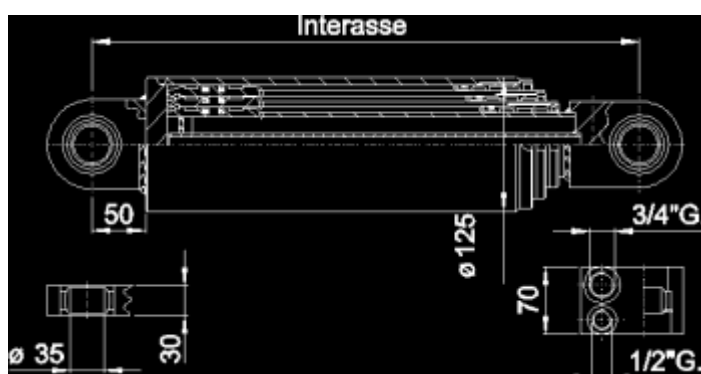

Sfilanti <i>Stages</i>	Kg Spinta <i>Kg Push</i>	Kg Tiro <i>Kg Pull</i>
1°sfili Ø100	15196 Kg	1500 Kg
2°sfili Ø 80	10172 Kg	
3°sfili Ø 60	6153 Kg	

Pressione 160 bar
Pressure 160 bar

<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimesions between these values can be supplied to order</u>			
Codice <i>Code</i>	Interasse <i>Closed</i>	Corsa <i>Stroke</i>	Aperto <i>Open</i>
T63/160/600	600	850	1450
T63/160/650	650	1000	1650
T63/160/700	700	1150	1850
T63/160/750	750	1300	2050
T63/160/800	800	1450	2250
T63/160/850	850	1600	2450
T63/160/900	900	1750	2650
T63/160/950	950	1900	2850
T63/160/1000	1000	2050	3050
T63/160/1050	1050	2200	3250
T63/160/1100	1100	2350	3450
T63/160/1150	1150	2500	3650
T63/160/1200	1200	2650	3850
T63/160/1250	1250	2800	4050
T63/160/1300	1300	2850	4150
T63/160/1350	1350	3000	4350
T63/160/1400	1400	3150	4550
T63/160/1450	1450	3300	4750
T63/160/1500	1500	3450	4950
T63/160/1550	1550	3600	5150




HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES

HANSA · TMP srl

**Serie T64/160 Telescopico doppio effetto 4 sfili
per macchine da compattazione rifiuti.
4 Stages double acting telescopic cylinder
T64/160 Series for garbage baling machines.**

File: t64-160

01/1998

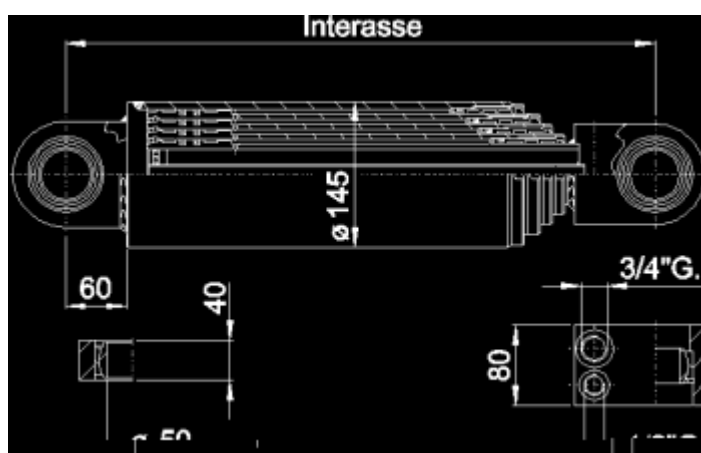

Sfilanti <i>Stages</i>	Kg Spinta <i>Kg Push</i>	Kg Tiro <i>Kg Pull</i>
1°sfili Ø120	21225 Kg	1500 Kg
2°sfili Ø100	15196 Kg	
3°sfili Ø 80	10172 Kg	
4°sfili Ø 60	6153 Kg	

Pressione 160 bar
Pressure 160 bar

<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimensions between these values can be supplied to order</u>			
Codice <i>Code</i>	Interasse <i>Closed</i>	Corsa <i>Stroke</i>	Aperto <i>Open</i>
T64/160/700	700	1450	2150
T64/160/750	750	1650	2400
T64/160/800	800	1850	2650
T64/160/850	850	2050	2900
T64/160/900	900	2250	3150
T64/160/950	950	2450	3400
T64/160/1000	1000	2650	3650
T64/160/1050	1050	2850	3900
T64/160/1100	1100	3050	4150
T64/160/1150	1150	3250	4400
T64/160/1200	1200	3450	4650
T64/160/1250	1250	3650	4900
T64/160/1300	1300	3750	5050
T64/160/1350	1350	3950	5300
T64/160/1400	1400	4050	5450




HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES

HANSA · TMP srl

**Serie T65/160 Telescopico doppio effetto 5 sfili
per macchine da compattazione rifiuti.
5 Stages double acting telescopic cylinder
T65/160 Series for garbage baling machines.**

File: t65-160

01/1998

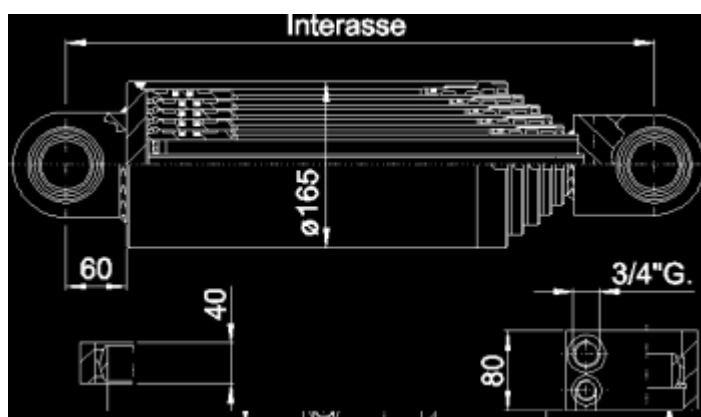

Sfilanti Stages	Kg Spinta Kg Push	Kg Tiro Kg Pull
1°sfili Ø140	28259 Kg	1500 Kg
2°sfili Ø120	21225 Kg	
3°sfili Ø100	15196 Kg	
4°sfili Ø 80	10172 Kg	
5°sfili Ø 60	6153 Kg	

Pressione 160 bar
Pressure 160 bar

<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimesions between these values can be supplied to order</u>			
Codice Code	Interasse Closed	Corsa Stroke	Aperto Open
T65/160/800	800	2260	3060
T65/160/850	850	2510	3360
T65/160/900	900	2760	3660
T65/160/950	950	3010	3960
T65/160/1000	1000	3260	4260
T65/160/1050	1050	3510	4560
T65/160/1100	1100	3760	4860
T65/160/1150	1150	4010	5160
T65/160/1200	1200	4260	5460
T65/160/1250	1250	4510	5760
T65/160/1300	1300	4650	5950
T65/160/1350	1350	4900	6250
T65/160/1400	1400	5080	6450
T65/160/1450	1450	5330	6750
T65/160/1500	1500	5580	7080



HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES


HANSA · TMP srl

**Serie T62/200 Telescopico doppio effetto 2 sfili
per macchine da compattazione rifiuti Carico
laterale N°2 per macchina**

2 Stages double acting telescopic cylinder
T62/200 Series for garbage baling machines
Side charge N°2 for machines.

File: t62-200

01/1998

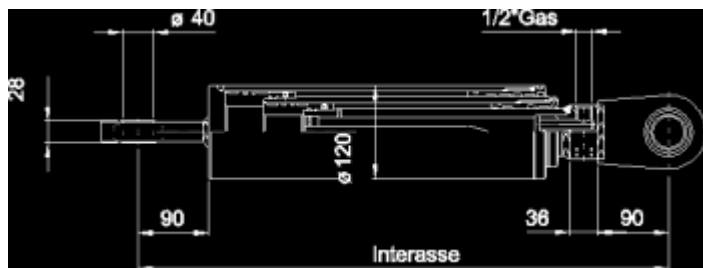

Sfilanti Stages	Kg Spinta Kg Push	Kg Tiro Kg Pull
1°sfili Ø 90	17308 Kg	3000 Kg
2°sfili Ø 60	8830 Kg	

**Pressione 200 bar
Pressure 200 bar**

<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimesions between these values can be supplied to order</u>			
Codice Code	Interasse Closed	Corsa Stroke	Aperto Open
T62/200/1800	1800	2260	4460
T62/200/1850	1850	2760	4660
T62/200/1900	1900	2860	4760
T62/200/1950	1950	2960	4960
T62/200/2000	2000	3060	5060
T62/200/2050	2050	3160	5260
T62/200/2100	2100	3260	5360
T62/200/2150	2150	3360	5510
T62/200/2200	2200	3460	5660
T62/200/2250	2250	3560	5810
T62/200/2300	2300	3660	5960
T62/200/2350	2350	3760	6110
T62/200/2400	2400	3860	6260
T62/200/2450	2450	3960	6410
T62/200/2500	2500	4060	6560




HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES

HANSA · TMP SPN

**Serie T63/200 Telescopico doppio effetto 3 sfili
per macchine da compattazione rifiuti.
3 Stages double acting telescopic cylinder
T63/200 Series for garbage baling machines.**

File: t63-200

01/1998

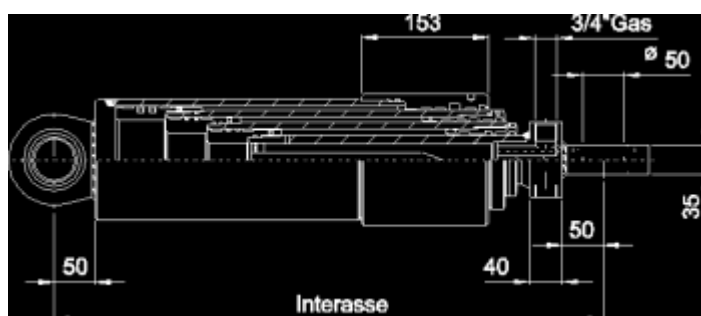

Sfilanti Stages	Kg Spinta Kg Push	Kg Tiro Kg Pull
1°sfili Ø120	26532 Kg	3000 Kg
2°sfili Ø 90	17308 Kg	
3°sfili Ø 60	8830 Kg	


Pressione 200 bar
Pressure 200 bar

<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimesions between these values can be supplied to order</u>			
Codice Code	Interasse Closed	Corsa Stroke	Aperto Open
T63/200/1000	1000	1670	2670
T63/200/1050	1050	1820	2870
T63/200/1100	1100	1970	3070
T63/200/1150	1150	2120	3270
T63/200/1200	1200	2270	3470
T63/200/1250	1250	2420	3670
T63/200/1300	1300	2570	3870
T63/200/1350	1350	2720	4070
T63/200/1400	1400	2870	4270
T63/200/1450	1450	3020	4470
T63/200/1500	1500	3170	4670
T63/200/1550	1550	3320	4870
T63/200/1600	1600	3470	5070
T63/200/1650	1650	3620	5270
T63/200/1700	1700	3770	5470

**Serie T62/220 Telescopico doppio effetto 2 sfili
per macchine da compattazione rifiuti.**
*2 Stages double acting telescopic cylinder
T62/220 Series for garbage baling machines.*

File: t62-220

01/1998

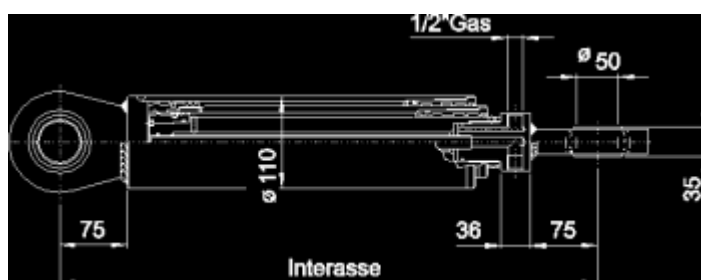

Sfilanti <i>Stages</i>	Kg Spinta <i>Kg Push</i>	Kg Tiro <i>Kg Pull</i>
1° sfili Ø 85	15584 Kg	2000 Kg
2° sfili Ø 60	8461 Kg	

Pressione 220 bar
Pressure 220 bar

<i>Si forniscono a richiesta dimensioni intermedie</i> <i>Dimensions between these values can be supplied to order</i>			
Codice <i>Code</i>	Interasse <i>Closed</i>	Corsa <i>Stroke</i>	Aperto <i>Open</i>
T62/220/1000	1000	1270	2270
T62/220/1050	1050	1370	2420
T62/220/1100	1100	1470	2570
T62/220/1150	1150	1570	2720
T62/220/1200	1200	1670	2870
T62/220/1250	1250	1770	3020
T62/220/1300	1300	1870	3170
T62/220/1350	1350	1970	3320
T62/220/1400	1400	2070	3470
T62/220/1450	1450	2170	3620
T62/220/1500	1500	2220	3720
T62/220/1550	1550	2320	3870
T62/220/1600	1600	2370	3970
T62/220/1650	1650	2470	4120
T62/220/1700	1700	2570	4270




HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES

HANSA · TMP srl

**Serie T64/220 Telescopico doppio effetto 4 sfili
per macchine da compattazione rifiuti.
4 Stages double acting telescopic cylinder
T64/220 Series for garbage baling machines.**

File: t64-220

01/1998

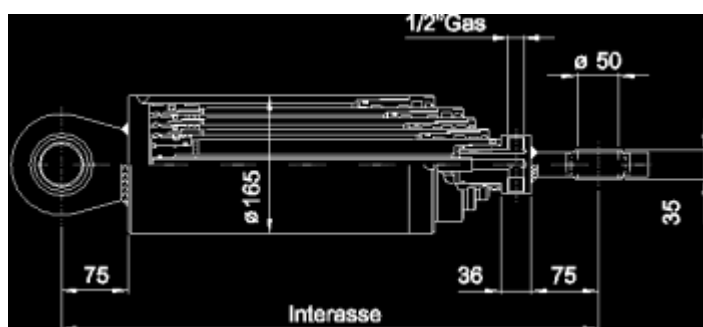

Sfilanti Stages	Kg Spinta Kg Push	Kg Tiro Kg Pull
1°sfili Ø135	36308 Kg	2000 Kg
1°sfili Ø110	24868 Kg	
2°sfili Ø 85	15584 Kg	
3°sfili Ø 60	8461 Kg	


Pressione 220 bar
Pressure 220 bar

<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimesions between these values can be supplied to order</u>			
Codice Code	Interasse Closed	Corsa Stroke	Aperto Open
T64/220/900	900	2060	2960
T64/220/950	950	2260	3210
T64/220/1000	1000	2460	3460
T64/220/1050	1050	2660	3710
T64/220/1100	1100	2860	3960
T64/220/1150	1150	3060	4210
T64/220/1200	1200	3260	4460
T64/220/1250	1250	3460	4710
T64/220/1300	1300	3660	4960
T64/220/1350	1350	3860	5210
T64/220/1400	1400	4060	5460
T64/220/1450	1450	4260	5710
T64/220/1500	1500	4460	5960
T64/220/1550	1550	4560	6110
T64/220/1600	1600	4660	6260

**Serie T94/200 Telescopico doppio effetto 4 sfili
per macchine da compattazione rifiuti**
4 Stages double acting telescopic cylinder
T94/200 Series for garbage baling machines

File: t94-200

01/1998

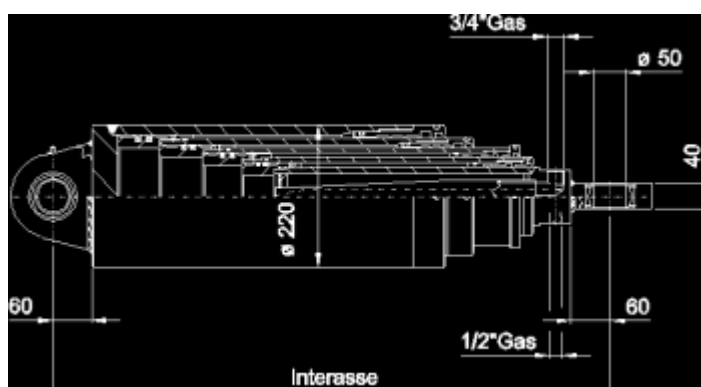

Sfilanti Stages	Kg Spinta Kg Push	Kg Tiro Kg Pull
1°sfili Ø180	56676 Kg	4100 Kg
2°sfili Ø150	40192 Kg	
3°sfili Ø120	28612 Kg	
4°sfili Ø 90	17308 Kg	

Pressione 200 bar
Pressure 200 bar

<u>Si forniscono a richiesta dimensioni intermedie</u> <u>Dimesions between these values can be supplied to order</u>			
Codice Code	Interasse Closed	Corsa Stroke	Aperto Open
T94/200/2100	2100	6100	8200
T94/200/2140	2140	6160	8300
T94/200/2150	2150	6300	8450
T94/200/2200	2200	6700	8900
T94/200/2300	2300	6800	9100
T94/200/2400	2400	7200	9600
T94/200/2500	2500	7600	10100
T94/200/2590	2590	7960	10550
T94/200/2600	2600	8000	10600
T94/200/2713	2713	8452	11165



HYDRAULIC COMPONENTS
HYDROSTATIC TRANSMISSIONS
GEARBOXES - ACCESSORIES

HANSA · TMP SRL

As HANSA-TMP has a very extensive range of products and some products have a variety of applications, the information supplied may often only apply to specific situations.

If the catalogue does not supply all the information required, please contact HANSA-TMP.

In order to provide a comprehensive reply to queries we may require specific data regarding the proposed application.

Whilst every reasonable endeavour has been made to ensure accuracy, this publication cannot be considered to represent part of any contract, whether expressed or implied. HANSA-TMP reserves the right to amend specifications at their discretion.



Dutch Hydraulic Consultants	Tel.	+31-(0)6-83695868
Achterweg ZZ 8	Mail	info@dhc-hydraulic.nl
3216AB Abbenbroek	Web	www.dhc-hydraulic.nl
Nederland		